

**OPEN ACCESS**

# Scientific Research and Essays

18 August 2018  
ISSN 1992-2248  
DOI: 10.5897/SRE  
[www.academicjournals.org](http://www.academicjournals.org)

## ABOUT SRE

**The Scientific Research and Essays (SRE)** is published twice monthly (one volume per year) by Academic Journals.

**Scientific Research and Essays (SRE)** is an open access journal with the objective of publishing quality research articles in science, medicine, agriculture and engineering such as Nanotechnology, Climate Change and Global Warming, Air Pollution Management and Electronics etc. All papers published by SRE are blind peer reviewed.

### Contact Us

Editorial Office: [sre@academicjournals.org](mailto:sre@academicjournals.org)

Help Desk: [helpdesk@academicjournals.org](mailto:helpdesk@academicjournals.org)

Website: <http://www.academicjournals.org/journal/SRE>

Submit manuscript online <http://ms.academicjournals.me/>.

## Editors

### **Dr. NJ Tonukari**

*Editor-in-Chief  
Scientific Research and Essays  
Academic Journals  
E-mail:sre.research.journal@gmail.com*

### **Dr. M. Sivakumar Ph.D. (Tech).**

*Associate Professor  
School of Chemical & Environmental Engineering  
Faculty of Engineering  
University of Nottingham  
JalanBroga, 43500 Semenyih  
SelangorDarul Ehsan Malaysia.*

### **Prof. N. Mohamed ElSawi Mahmoud**

*Department of Biochemistry, Faculty of science, King  
Abdul Aziz university,  
Saudi Arabia.*

### **Prof. Ali Delice**

*Science and Mathematics Education Department, Atatürk  
Faculty of Education,  
Marmara University, Turkey.*

### **Prof. Mira Grdisa**

*RudjerBoskovicInstitute, Bijenickacesta54,  
Croatia.*

### **Prof. Emmanuel HalaKwon-Ndung**

*Nasarawa State University Keffi Nigeria  
PMB1022 Keffi,  
Nasarawa State.  
Nigeria.*

### **Dr. Cyrus Azimi**

*Department of Genetics, Cancer Research Center,  
CancerInstitute, Tehran University of Medical Sciences,  
Keshavarz Blvd.,  
Tehran, Iran.*

### **Dr. Gomez, Nidia Noemi**

*National University of San Luis,  
Faculty of Chemistry, Biochemistry and Pharmacy,  
Laboratory of Molecular Biochemistry  
EjercitodelosAndes950-5700 SanLuis  
Argentina.*

### **Prof.M.Nageeb Rashed**

*Chemistry Department-Faculty of Science,  
Aswan South Valley University,  
Egypt.*

### **Dr. John W. Gichuki**

*KenyaMarine& FisheriesResearchInstitute,  
Kenya.*

### **Dr. Wong Leong Sing**

*Department of Civil Engineering,  
College of Engineering,  
Universiti Tenaga Nasional,  
Km7, JalanKajang-Puchong,  
43009Kajang, SelangorDarulEhsan, Malaysia.*

### **Prof. Xianyi Li**

*College of Mathematics and Computational Science  
Shenzhen University Guangdong,518060  
P.R.China.*

### **Prof. Mevlut Dogan**

*Kocatepe University, Science Faculty, Physics Dept.  
Afyon/Turkey.  
Turkey.*

### **Prof. Kwai-Lin Thong**

*Microbiology Division, Institute of Biological Science,  
Faculty of Science, University of Malaya, 50603,  
KualaLumpur,  
Malaysia.*

### **Prof. Xiacong He**

*Faculty of Mechanical and Electrical Engineering, Kunming  
University of Science and Technology, 253 XueFu Road,  
Kunming,  
P.R.China.*

### **Prof. Sanjay Misra**

*Department of Computer Engineering  
School of Information and Communication Technology  
Federal University of Technology, Minna,  
Nigeria.*

### **Prof. Burtram C. Fielding Pr. Sci. Nat.**

*Department of Medical BioSciences  
University of the Western Cape Private Bag X17  
Modderdam Road  
Bellville,7535,SouthAfrica.*

### **Prof.Naqib Ullah Khan**

*Department of Plant Breeding and Genetics  
NWFP Agricultural University Peshawar 25130,  
Pakistan*

## Editorial Board

**Prof. Ahmed M. Soliman**

20MansourMohamedSt.,Apt51,Zamalek,  
Cairo,  
Egypt.

**Prof. JuanJosé Kasper Zubillaga**

Av.Universidad1953Ed.13depto304,  
MéxicoD.F.04340,  
México.

**Prof. ChauKwok-wing**

University of Queensland Instituto  
Mexicanodel Petroleo, Eje Central  
Lazaro Cardenas Mexico D.F.,  
Mexico.

**Prof. Raj Senani**

Netaji Subhas Institute of Technology,  
Azad Hind Fauj Marg, Sector3,  
Dwarka, New Delhi 110075, India.

**Prof. RobinJ Law**

CefasBurnham Laboratory,  
Remembrance Avenue Burnhamon Crouch, Essex  
CM08HA,  
UK.

**Prof. V. Sundarapandian**

IndianInstitute of Information Technologyand  
Management-Kerala  
Park Centre,  
Technopark Campus,Kariavattom P.O.,  
Thiruvananthapuram-695581,Kerala,India.

**Prof. Tzung-PeiHong**

Department of Electrical Engineering,  
Andat the Department of Computer Science and  
Information Engineering  
NationalUniversity ofKaohsiung.

**Prof.Zulfiqar Ahmed**

Department of Earth Sciences, box5070,  
Kfupm, dhahran-31261, SaudiArabia.

**Prof. Khalifa Saif Al-Jabri**

Department of Civil and Architectural Engineering  
College of Engineering, Sultan  
Qaboos University  
P.O.Box33,Al-Khod123,Muscat.

**Prof. V.Sundarapandian**

Indian Institute of Information Technology &  
Management-Kerala  
Park Centre,  
Technopark,Kariavattom P.O.  
Thiruvananthapuram-  
695581,KeralaIndia.

**Prof. Thangavelu Perianan**

Department of Mathematics,  
Aditanar College,  
Tiruchendur-628216India.

**Prof. Yan-zePeng**

Department of Mathematics,  
Huazhong University of Science and  
Technology,Wuhan430074,P.R.  
China.

**Prof. KonstantinosD.Karamanos**

Universite Librede Bruxelles,  
CP231 Centre of Nonlinear  
Phenomena And Complexsystems,  
CENOLIBoulevarddeTriomphe  
B-1050,  
Brussels,  
Belgium.

**Prof. XianyilLi**

School of Mathematics and Physics,  
Nanhua University, Hengyang City,  
Hunan Province,  
P.R.China.

**Dr. K.W.Chau**

HongKong Polytechnic University  
Department of Civil & Structural  
Engineering, HongKong Polytechnic  
University, Hunghom, Kowloon,  
HongKong,  
China.

**Dr. AmadouGaye**

LPAO-SF/ESPPoBox5085Dakar-FannSENEGAL  
University Cheikh Anta Diop  
Dakar SENEGAL.

**Prof. MasnoGinting**

P2F-LIPI,Puspipstek-Serpong,  
15310 Indonesian Institute of Sciences,  
Banten-Indonesia.

**Dr. Ezekiel Olukayode Idowu**

Department of Agricultural Economics,  
Obafemi Awolowo University, Ife-Ife,  
Nigeria.

# Scientific Research and Essays

Table of Contents: Volume 13 Number 12 18 August, 2018

## ARTICLE

<b>Probabilistic seismic assessment of arch dams in Turkey</b>	<b>123</b>
Kasim A. Korkmaz and Asuman I. Carhoglu	

*Full Length Research Paper*

# **Probabilistic seismic assessment of arch dams in Turkey**

**Kasim A. Korkmaz<sup>1\*</sup> and Asuman I. Carhoglu<sup>2</sup>**

<sup>1</sup>School of Visual and Built Environments, Eastern Michigan University, Ypsilanti, MI, USA.

<sup>2</sup>Civil Engineering Department, Suleyman Demirel University, Isparta, Turkey.

Received 11 February, 2017; Accepted 16 August, 2018

**Arch dams are of great importance in the world. In Turkey, there are 1200 existing dams with different types. Arch dams are important due to their economic resource in irrigation and water supply which are significant to the homeland security and the agricultural economy. Researchers have been carrying out various studies on dams and their seismic resistance especially after the earthquakes that occurred in the recent years. Turkey is also located at one of the earthquake-active zones. In 1999, devastating earthquakes hit Turkey causing severe property losses and thousands of lives. Excessive ground deformation caused severe crack to the existing buildings. Therefore, it is important to investigate the seismic safety of the existing dams in Turkey. In this study, probabilistic seismic risk assessment has been carried out for arch dams: Gökçekaya, Oymapinar, Karakaya, Gezende, Sir, Berke, Deriner, Ermenek Dams. For these arch dams, structural resistances have been discussed. In addition, their resistances have been determined through time history analysis with 60 different ground motion data. After time history analyses, fragility analyses for arch dams have been carried out. The fragility analysis has been used to determine probability of exceedance. Via fragility analyses, level of risk and probability of exceedance have been determined. The exceedance probabilities of the yield and collapse limit states for arch dams in Turkey have been obtained for a realistic probabilistic determination. According to the results, the role of probabilistic seismic risk assessment in dam safety decisions is addressed in detail.**

**Key words:** Arch dams, probabilistic seismic assessment, structural assessment, time history analysis, fragility analysis.


## **INTRODUCTION**

Arch dams are of great importance in Turkey and also in the world due to their economic values in irrigation and water supply which are critical for the homeland security and the agricultural economy. Numerous researches have been conducted on dams and their seismic

resistance especially after the earthquakes occurrences of the recent years. It became more important after the earthquakes in 1964 in Alaska and 1971 in San Fernando.

There are various valuable research works available in

\*Corresponding author. E-mail: [kkorkmaz@emich.edu](mailto:kkorkmaz@emich.edu) Tel: +1-734-487-2492.

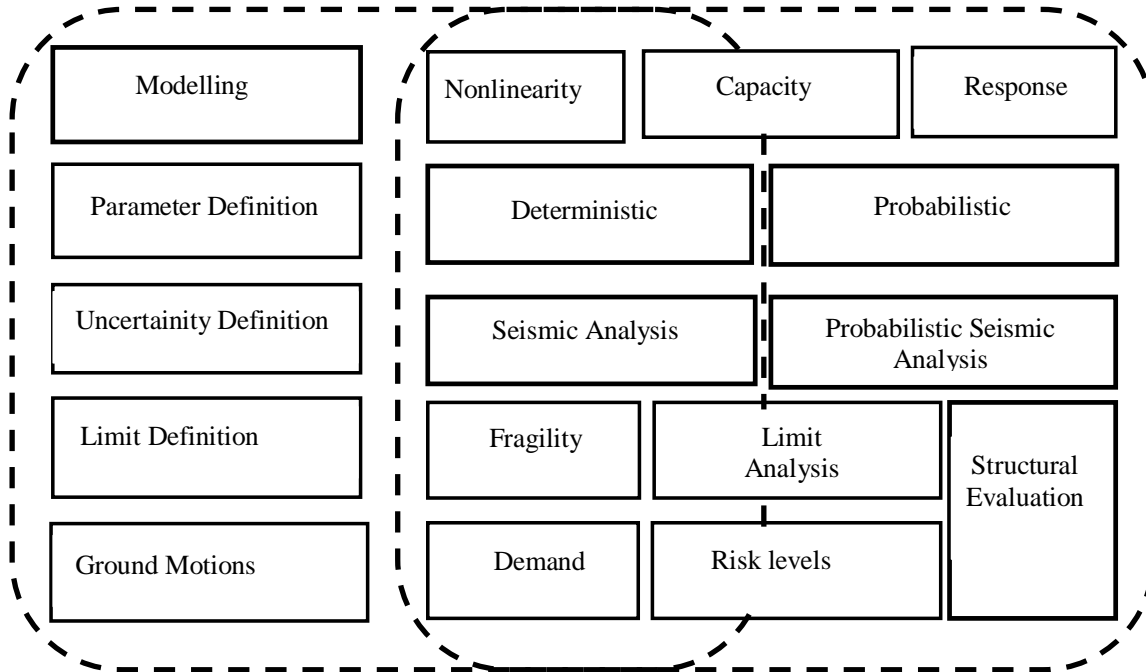

**Figure 1.** Schematic representation of the elements of the seismic risk analysis.


the literature. The dissemination of risk analysis procedures in dam engineering and the interest of scientific community began in the 1990s, even if the first risk analyses were conducted in the 1970s (Pimenta, 2013). Leclerc et al. (2003) conducted the static and seismic analysis of different load conditions using various fracture criteria and uplifting pressures of dams. Zhang et al. (2001) carried out the static and stability analyses of dams using rigid-spring element method and found static and dynamic factor of safety of dam slopes. The other important research works on structural assessment of existing dams are done by Turkman (1991), Yu et al. (2005), Calayir and Karaton (2005), Javanmardi et al. (2005), Uddin (1999), Espander and Lotfi (2003), Azmi and Paultre (2002), and Ahmadi et al. (2001). In these research works, structural behavior of existing dams in different places were investigated through nonlinear analysis and the results were documented.

In the present research, seismic analysis of arch dams was carried out through finite element analysis on the created structural models. Structural models for existing dams which provide expression of earthquake behavior of dams were created using finite element modeling and the parameters were determined to represent random characteristics. It can be said that accuracy of structural modeling is very critical for accuracy in the analyses.

Probabilistic approach is also associated with testability of model information. Probabilistic seismic evaluation methods cover the approaches which are based on the expression as probability of the behavior of existing structures and that are widely used today. The risk in the

analysis of structural systems is the probability of occurrence of an event which is undesirable. Generally, the structural reliability is based on the possibility of collapse of the structure and is also referred to as breaking performance of the structures in the analysis (Korkmaz, 2005). The application of deterministic approaches, excluding probabilistic seismic analysis may be insufficient in the expression of the seismic structural behavior. The uncertainty and lack depend on the different reasons in the numerical expressions such as capacity and response in the analysis. Due to such uncertainties which cannot be expressed probabilistically, it is not possible to conclude that the results of deterministic methods are valid for every case. Limited information affects the results, hence, sensitivity analysis can be carried out as a part of probabilistic approach. In Figure 1, risk analysis steps used in seismic risk analysis were given as detailed. The probabilistic seismic analysis is expressed as the inclusion to the structural analysis of the concept of the limit state exceedance probability accepted for fracture cases. Fragility analysis is the expression of the vulnerability of the structure (Castaldo et al., 2015, 2016 a, b, 2017 a, b).

Fragility analysis used in analyzing the building structures is also used in the determination of damage of the dam structures. As a result of the analysis performed with the chosen design parameters, the parameters effecting the structural behavior are obtained. The behavior parameters obtained in the results analysis would become a function of the design parameters. On the other hand, in the determination of non-specific

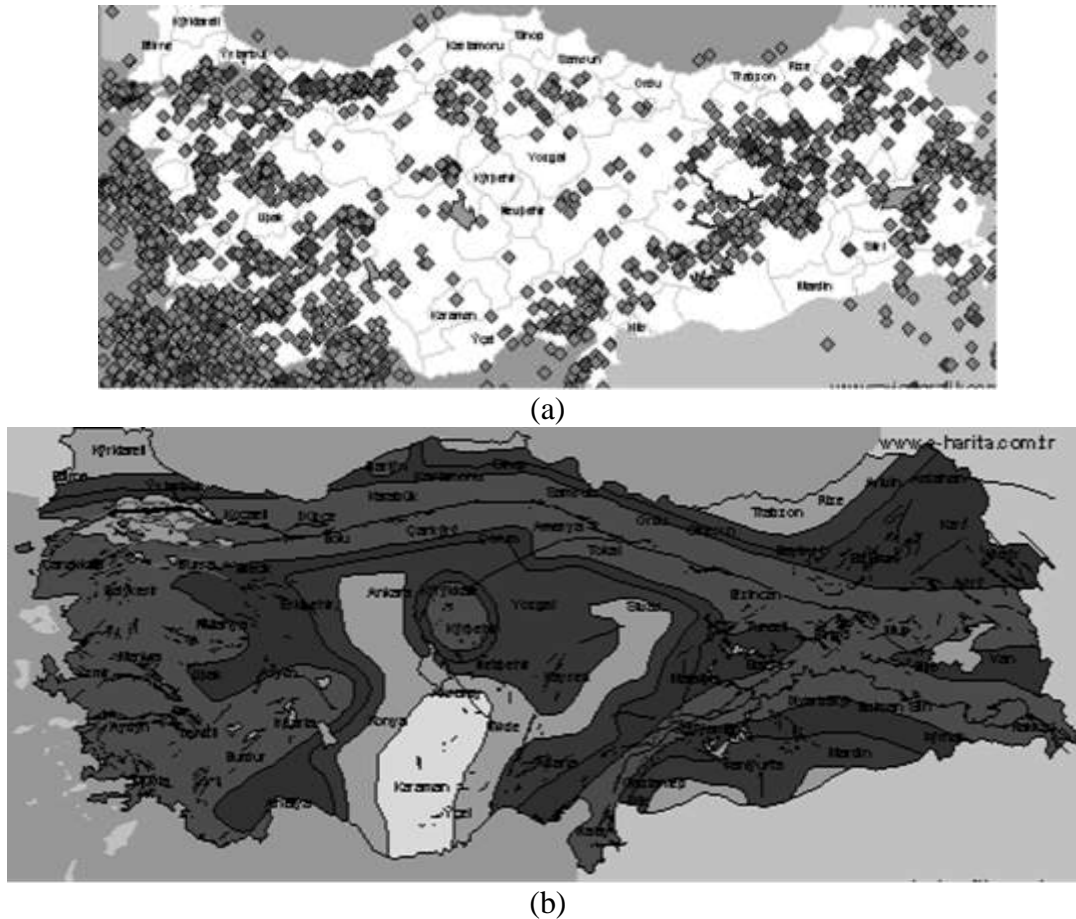

**Figure 2.** Turkish Earthquake and Seismic Map. (a) Turkish map with epicentres ( $M > 4$ ) of the earthquakes between 1973-2009 with USGS data (Turkish Earthquake Site, 2009) (b) Turkish seismic map with fault lines (Turkish Earthquake Site, 2009).

behavioral parameters, it may be necessary to implement the probabilistic seismic damage models and probabilistic analysis methods. Therefore, considered criteria should be evaluated in each step to determine the effectiveness on the analysis. This step is called the evaluation step.

The concept of probability goes back to 1940s which was used first time in the determination of seismic safety (Marek, 2003). In recent years, probabilistic seismic analysis methods have shown significant improvements. User loads, external influences and the uncertainties in material properties has required the use of the probabilistic approach in the seismic analysis.

Using probabilistic analysis was based on the concepts of uncertainty and randomness. To complete these analyses correctly, the data used in the analysis are important for the accuracy of the analysis. Defining concept of probability is necessary to provide risk assesment analysis. Therefore, in the analyses, risk and exceedance probabilities are obtained. When performing analysis, the concepts of seismic damage curves, limit states of the structures and risk levels are given. The

probability analysis is of great importance in terms of the determination of the acceptable risk level.

## SEISMIC SETTING

Earthquakes hit Turkey very often, causing serious damage to existing buildings and led to a significant life and economic loss. In 1999, two major earthquakes hit the northwestern region of Turkey and damaged or destroyed many buildings. The seismic activity of the country might be best explained by illustrating the epicenters and magnitudes of the earthquakes ( $M > 4$ ) that have occurred in Turkey through history as in Figure 2a. In Figure 2a, it is clearly seen that, northwestern and western Turkey are areas of significant seismic activity. In Figure 2b, Turkish seismic map with fault lines is shown (Turkish Earthquake Site, 2009). Table 1 shows the recent major earthquakes in Turkey (Inel et al., 2008).

Turkey is located in the southeast side of Europe and covers an area of 77.95 million ha. Almost one-third of



**Table 1.** Recent major earthquakes in Turkey.

Date (dd/mm/yy)	Magnitude	Location	Latitude (N)	Long. (E)	Depth (km)	Deaths	Injured	Heavily damaged buildings
13.03.1992	6.8	Erzincan	39.68	39.56	27	653	3850	6702
01.10.1995	5.9	Dinar	38.18	30.02	24	94	240	4909
27.06.1998	5.9	Adana	36.85	35.55	23	146	940	4000
17.08.1999	7.4	Kocaeli	40.70	29.91	20	15 000	32 000	50 000
12.11.1999	7.2	Duzce	40.79	31.21	11	845	4948	15 389
03.02.2002	6.5	Afyon	38.46	31.30	6	42	325	4401
01.05.2003	6.4	Bingol	38.94	40.51	6	176	521	1351

this area (28 million ha) can be classified as cultivable land. About 8.5 million ha is feasibly irrigable with the use of available and appropriate technology. However, only 2.5 million ha land has been irrigated up until now (Tosun et al., 2007). Water and energy supplies are key factors that affect the economic development and environmental improvement of Turkey. The total number of dams that are constructed in Turkey is 1,200 (Tosun et al., 2007). In Turkey, high magnitude earthquakes that potentially cause hazards on dams occur frequently. High magnitude earthquakes can cause: deep cracks along or perpendicular to the crest, deterioration of the rip-rap or sealing system and displacement or settlement of the crest. Therefore, it is necessary to determine the displacements and stresses that occur during the construction of dams. Displacements and stresses vary depending on the material properties and earthquake's features.

### SEISMIC ANALYSIS AND DESIGN ASPECTS OF EXISTING DAMS

Assessment of the impact of earthquake on existing dams can be challenging, as it requires more sophisticated analysis tools than those used for the usual analyses. Understanding the behavior of a dam is also a challenging task as the behavior is shaped by the complex interaction between various components of the dam (Yalin, 2013). Over the decades, significant developments have been accomplished in understanding the dynamic response of dams (Espander and Lotfi, 2003; Azmi and Paultre, 2002). Significant progress has been attained in the linear-elastic dynamic analysis of the existing dams and the equivalent linear method has been developed for earthfill/rockfill dams, which has been widely used for practical applications. Accuracy of nonlinear dynamic analysis of the existing dams is related with defining joint behavior and cracking in the analysis. These definitions directly affects the structural modeling and analysis. For instance, time history analyses are one of the important analyses tools to understand the structural behavior. Through the existing research works, significant progress has been achieved in understanding

the dynamic characteristics of dams (Espander and Lotfi, 2003; Azmi and Paultre, 2002; Ahmadi et al., 2001).

The International Commission on Large Dams (ICOLD) and FEMA committees has prepared number of guidelines on various aspects of seismic analysis, design and seismic monitoring of the existing dams. These guidelines are considered as seismic codes in the countries which do not have any specific codes or regulations for dams (ICOLD, 1989; FEMA, 2005).

In this study, the earthquake safety of existing arch dams in Turkey were examined. Investigated arch dams are Gökçekaya, Oymapinar, Karakaya, Gezende, Sir, Berke, Deriner, Ermenek Dams. The arch dams and their properties was presented in Table 2 (Dumanoğlu and Akköse, 2003). The material properties of the arch dams in Turkey are presented in Table 3. Gökçekaya Dam is located in Eskişehir, Oymapinar Dam is located in Antalya, Karakaya Dam is located in Diyarbakir, Gezende Dam is located in Mersin, Sir Dam is located in Kahramanmaraş, Berke Dam is located in Osmaniye, Deriner Dam is located in Artvin, and Ermenek Dam is located in Karaman in Turkey.

Dynamic analysis was carried out for selected arch dams. The dynamic equilibrium equations were integrated by using the step by step numerical processing. Direct integration is to make step by step processing without transforming to a different form of the equations (Bathe, 1996). The dynamic analysis were made by applying 60 earthquake acceleration records of A, B and C soil classes. The properties of earthquakes are presented in Tables 4 to 6. Seismic probability analysis were made by using the values obtained. The mass adding approach of Westergard was used at hydrodynamic pressure estimation (Westergard, 1933). According to the Westergard approach, the liquid impact was calculated by the following equations.

$$P=C.g.m \quad (1)$$

$$m=(7/8)\sqrt{H.y(w/g)} \quad (2)$$

$$P=(7/8)cw\sqrt{Hy} \quad (3)$$

**Table 2.** The arch dams in Turkey and their properties.

Arch Dams	Heights		Crest Elevation (m)	Body Volume	Crest Length (m)	Crest Width (m)
	From Basic	From Thalveg				
Gökçekaya	158	113.5	392	650	479.66	6
Oymapinar	185	157	185	676	360	5
Karakaya	173	158	698	2000	462	12
Gezende	75	71	335	83	120	7.5
Sir	116	106	443	494	360	5
Berke	201	186	346	7292	270	4.6
Deriner	253	209	397	2037	720	18
Ermenek	218	210	700	272	123	7

**Table 3.** The material properties of dams.

Dams	Concrete class
Gökçekaya	C25
Karakaya	C30
Gezende	C30
Sir	C25
Berke	C30
Ermenek	C35
Deriner	C30
Oymapinar	C30

**Table 4.** The earthquake data of A soil class.

Number	Earthquake	Date	Magnitude (Mw)	Records	Ground Velocity (cm/s)	Ground Acc. (g)	Focus Length (km)
1	Anza (Horse Canyon)	25/02/1980	4.9	AZF315	2.6	0.066	12.1
2	Morgan Hill	24/04/1984	6.2	G01320	2.9	0.098	16.2
3	Coyote Lake	06/08/1979	5.7	G01320	8.3	0.132	9.3
4	Landers	28/06/1992	7.3	GRN180	14.1	0.041	141.6
5	Landers	28/06/1992	7.3	ABY090	20	0.146	69.2
6	Landers	28/06/1992	7.3	SIL000	3.8	0.05	51.7
7	Landers	28/06/1992	7.3	29P000	3.7	0.08	42.2
8	Loma Prieta	18/10/1989	6.9	G01090	33.9	0.473	11.2
9	Loma Prieta	18/10/1989	6.9	SGI360	8.4	0.06	30.6
10	Loma Prieta	18/10/1989	6.9	MCH000	3.5	0.073	44.8
11	Loma Prieta	18/10/1989	6.9	PTB297	12.9	0.072	78.3
12	Lytle Creek	12/09/1970	5.9	CSM095	1.8	0.071	88.6
13	N. Palm Springs	08/07/1986	6.0	AZF225	5.8	0.099	20.6
14	N. Palm Springs	08/07/1986	6.0	ARM360	3.4	0.129	46.7
15	N. Palm Springs	08/07/1986	6.0	H02090	1.8	0.093	45.6
16	N. Palm Springs	08/07/1986	6.0	H02000	1.9	0.07	57.6
17	Whittier Narrows	01/10/1987	5.3	MTW000	40	0.123	20.4
18	Anza (Horse Canyon)	25/02/1980	4.9	AZF225	3.3	0.065	12.1
19	Anza (Horse Canyon)	25/02/1980	4.9	PTF135	5.1	0.131	13
20	Anza (Horse Canyon)	25/02/1980	4.9	TVY135	1.7	0.081	5.8


**Table 5.** The earthquake data of B soil class.

Number	Earthquake	Date	Magnitude (Mw)	Records	Ground Velocity (cm/s)	Ground Acc. (g)	Focus Length (km)
1	Parkfield	28/06/1966	5.6	C12320	6.8	0.0633	14.7
2	Morgan Hill	24/04/1984	6.2	GIL067	3.6	0.1144	16.2
3	Kocaeli	17/08/1999	7.4	ARC000	17.7	0.2188	17
4	Morgan Hill	24/04/1984	6.2	G06090	36.7	0.2920	11.8
5	Coyote Lake	06/08/1979	5.8	G06230	49.2	0.4339	3.1
6	Northridge	17/01/1994	6.7	ORR090	52.1	0.5683	22.6
7	Loma Prieta	18/10/1989	7.1	CLS000	55.2	0.6437	5.1
8	Kobe	16/01/1995	6.9	KJM000	79.3	0.8213	6.9
9	Santa Barbara	13/08/1978	7.2	SBA222	16.3	0.203	14.0
10	Livemor	27/01/1980	7.4	LMO355	9.8	0.252	8.0
11	N. Palm Springs	08/07/1986	6.0	DSP000	33.8	0.331	8.2
12	N. Palm Springs	08/07/1986	6.0	FVR045	41.2	0.129	13.0
13	Northridge	17/01/1994	6.7	TPF000	17.6	0.364	37.9
14	San Fernando	02/09/1971	6.6	ORR021	15.6	0.324	24.9
15	Whitter Narrows	10/01/1987	6.0	ALH180	22	0.333	13.2
16	Kocaeli	17/08/1999	7.4	SKR090	79.5	0.376	3.1
17	Victoria, Mexica	09/06/1980	6.1	CPE045	31.6	0.62	34.8
18	Anza (Horse Cany)	25/02/1980	4.9	BAR225	2.6	0.047	40.6
19	Anza (Horse Cany)	25/02/1980	4.9	RDA045	6.7	0.097	19.6
20	<b>Borrego Mtn</b>	09/04/1968	6.8	PAS270	4.7	0.090	203.0


**Table 6.** The earthquake data of C soil class.

Number	Earthquake	Date	Magnitude (Mw)	Records	Ground Velocity (cm/s)	Ground Acc. (g)	Focus Length (km)
1	Borrego Mtn	09/04/1968	6.8	A-ELC180	26.3	0.13	46.0
2	Borrego Mtn	09/04/1968	6.8	A-PEL090	2.9	0.012	217.4
3	Borrego Mtn	09/04/1968	6.8	A-TLI249	2.8	0.01	195.0
4	Coyote Lake	06/08/1979	5.7	G02140	40.0	0.339	7.5
5	Coyote Lake	06/08/1979	5.7	G03050	40.0	0.272	6.0
6	Coyote Lake	06/08/1979	5.7	G04270	25.0	0.248	4.5
7	Coyote Lake	06/08/1979	5.7	HVR150	15.0	0.039	31.2
8	Imperial Valley	15/10/1979	7.0	I-ELC180	29.8	0.313	8.3
9	Imperial Valley	15/10/1979	7.0	H-AEP045	42.8	0.327	8.5
10	Imperial Valley	15/10/1979	7.0	H-BCR230	40.0	0.775	2.5
11	Imperial Valley	15/10/1979	6.5	H-BRA315	40.0	0.220	8.5
12	Imperial Valley	15/10/1979	6.5	H-CX0225	40.0	0.275	10.6
13	Hollister	28/11/1974	5.2	A-HCH271	10.3	0.177	10.0
14	Cape Mendocino	25/04/1992	7.1	PET090	89.7	0.662	9.5
15	Coalinga	02/05/1983	6.4	H-C05270	10.8	0.147	47.3
16	Coalinga	02/05/1983	6.4	H-C08000	8.6	0.098	50.7
17	Kern County	21/07/1952	7.4	HOL180	5.3	0.057	120.5
18	Kern County	21/07/1952	7.4	PEL180	6.2	0.058	120.5
19	Loma Prieta	18/10/1989	6.9	HCH090	38.5	0.247	28.2
20	Loma Prieta	18/10/1989	6.9	G02000	32.9	0.367	12.7


P: hydrodynamic pressure, m: mass of liquid, C: the rate of earthquake acceleration to gravity acceleration, W: the

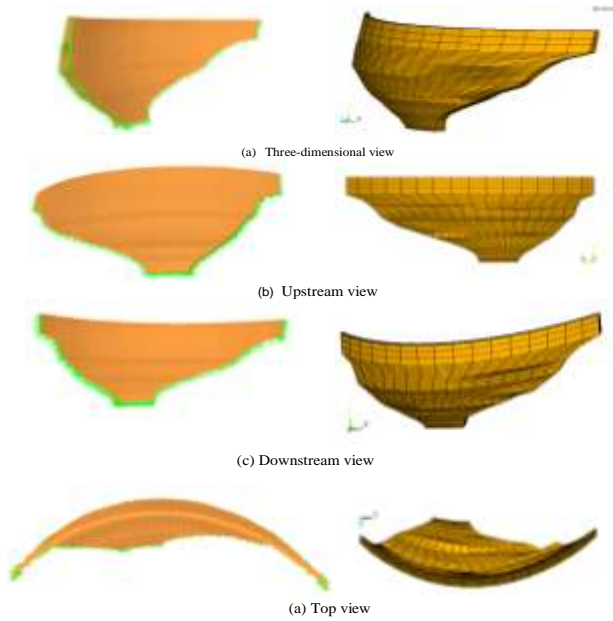


**Figure 3.** The views modelled of Gökçekaya Dam with SAP2000 (Left) and ANSYS (right).

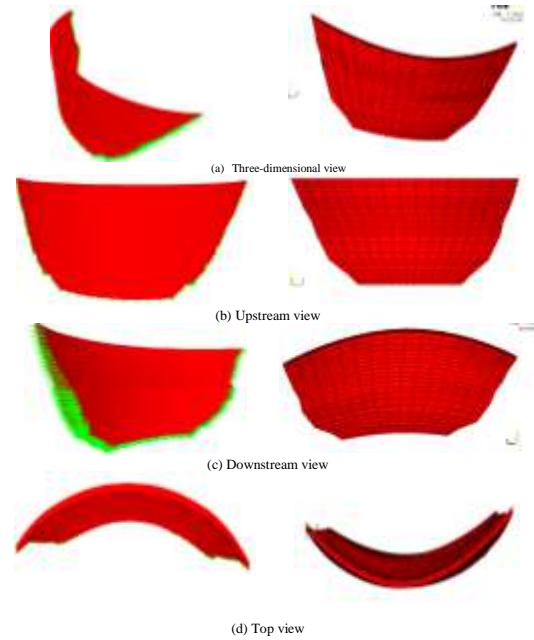

**Figure 5.** The views modelled of Karakaya Dam with SAP2000 (Left) and ANSYS (right).

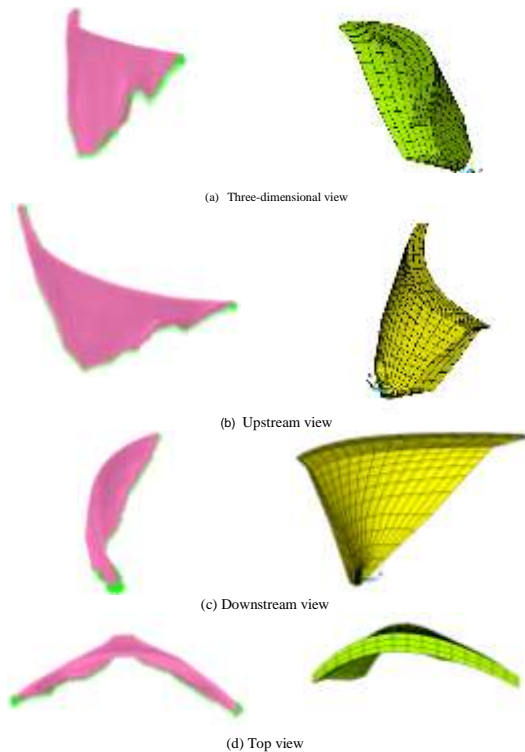


**Figure 4.** The views modelled of Oymapinar Dam with SAP2000 (Left) and ANSYS (right).

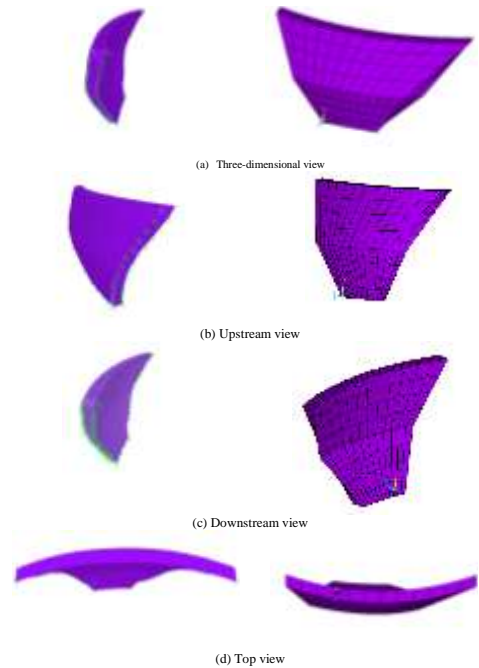


**Figure 6.** The views modelled of Gezende Dam with SAP2000 (Left) and ANSYS (right).

density of liquid,  $H$ : the depth of water,  $Y$ : the distance of the water depth to crest level.


Dams were modelled via SAP 2000 V14. The modelled dams are presented between Figure 3 and 10. 60 earthquake acceleration records of A, B and C soil classes have

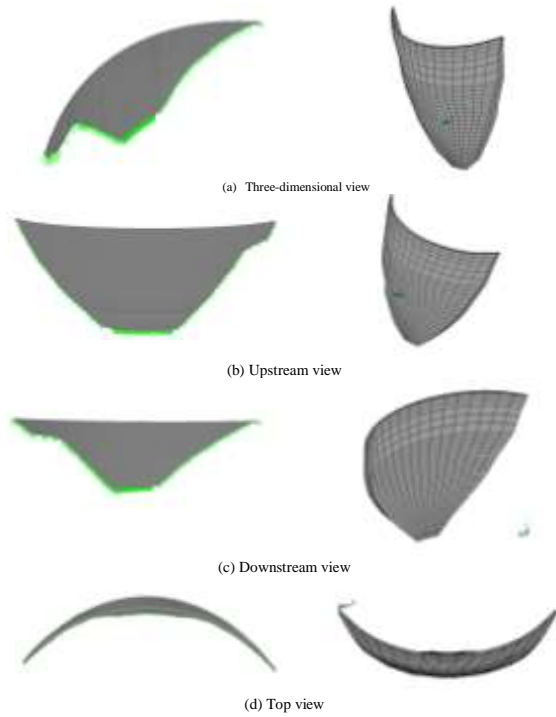


**Figure 7.** The views modelled of Sir Dam with SAP2000 (Left) and ANSYS (right).

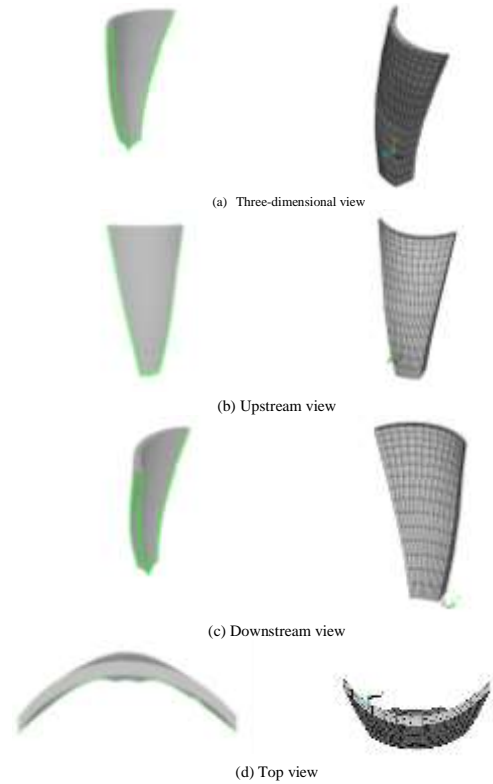

**Figure 9.** The views modelled of Ermenek Dam with SAP2000 (Left) and ANSYS (right).

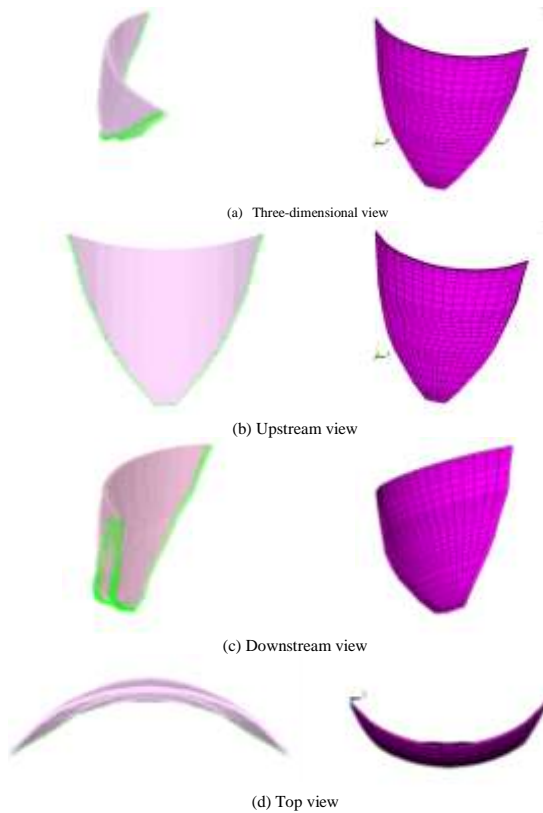


**Figure 8.** The views modelled of Berke Dam with SAP2000 (Left) and ANSYS (right).

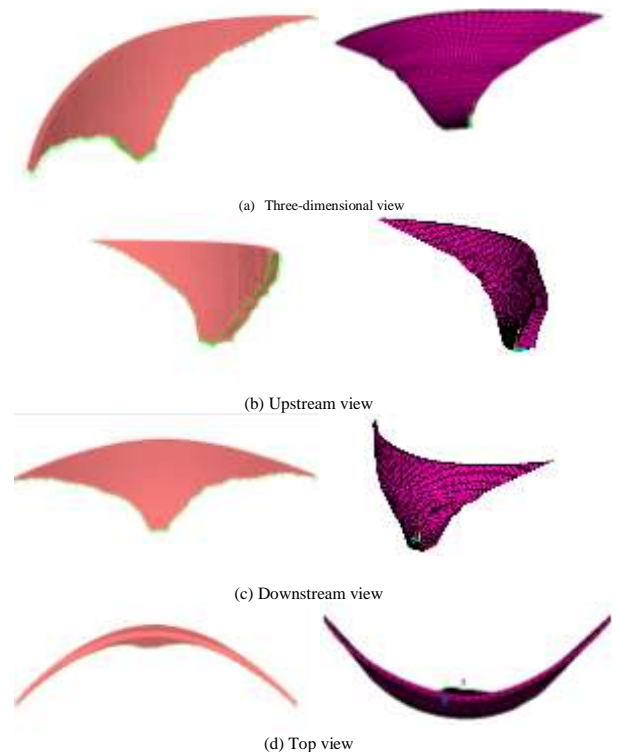

**Figure 10.** The views modelled of Deriner Dam with SAP2000 (Left) and ANSYS (right).

**Table 7.** The application steps of the fragility analysis.


S/N	Approach
1	Acceleration records to be used for the dynamic analysis were chosen and they were classified according to the soil classes.
2	The dynamic analyzes were performed in the time domain.
3	Limit displacement values were determined for each dam and every one earthquake data.
4	Behavior of the system and displacement values were determined.
5	When the displacement demands compared with the limit values of prescribed damage levels, the cases of dams were determined.
6	The lognormal distribution parameters of fragility curves plotted according to the displacement were obtained as standard deviation and mean
7	Exceedence probability was controlled and each level was checked.
8	The fragility curves obtained were classified according to the soil class, X and Y direction and the situation whether the effect of the water take consideration
9	Dams were compared with together by giving on a single graph.

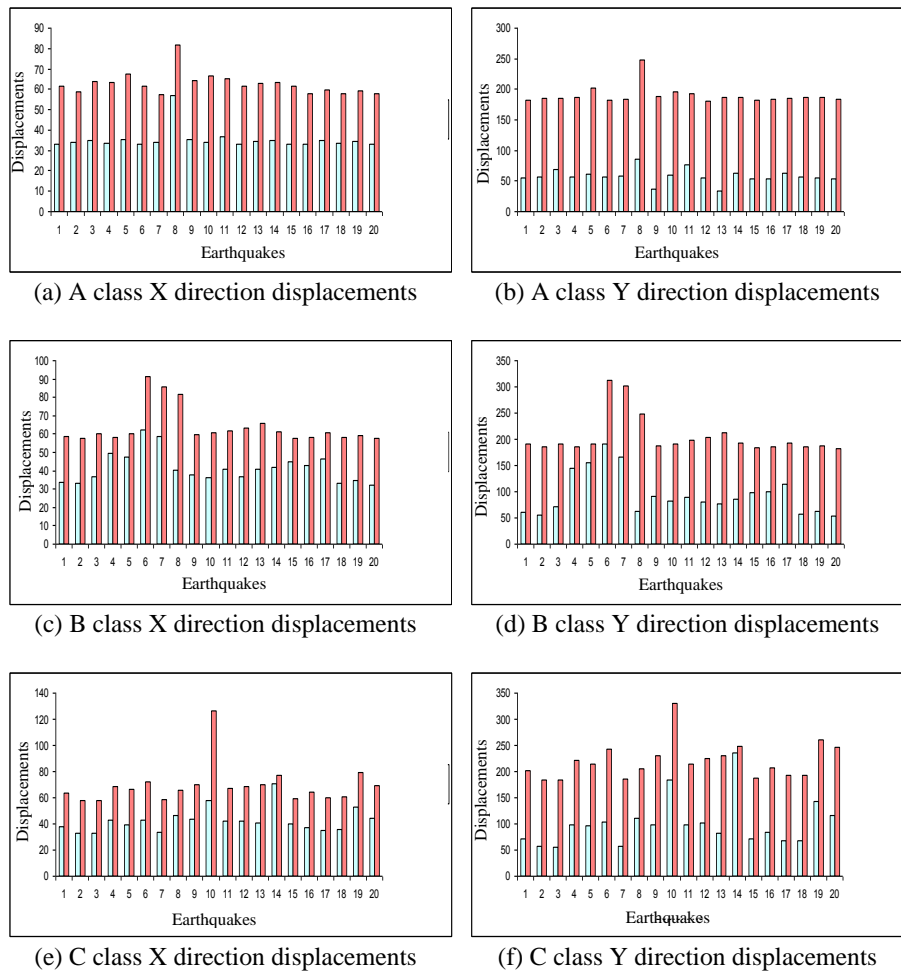**Figure 11.** The maximum displacement values of Gökçekaya Dam.


been considered. In the scope of the study, the steps for each dam model were taken into consideration as vulnerability expression as given in Table 7.

Performance assessment of existing dam structures using ground motion data from A, B and C soil classes for Gökçekaya Dam, Oymapinar Dam, Karakaya Dam,


Gezende Dam, Sir Dam, Berke Dam, Deriner Dam, and Ermenek Dam, along with displacement values in X and Y directions are presented in Figures 11 to 18 respectively. As seen in Figure 11, the maximum displacement value in X direction in A soil class, Gökçekaya Dam was obtained in Loma Prieta earthquake

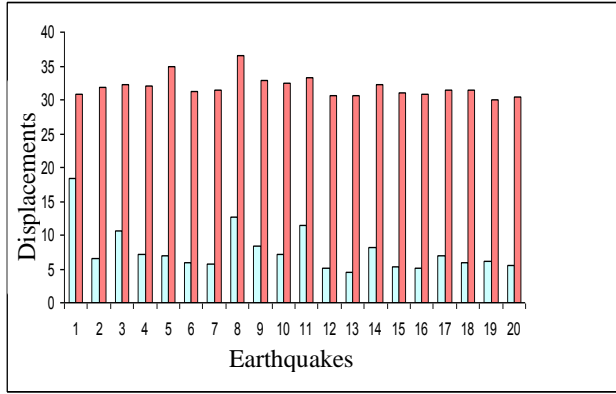


(a) A class X direction displacements

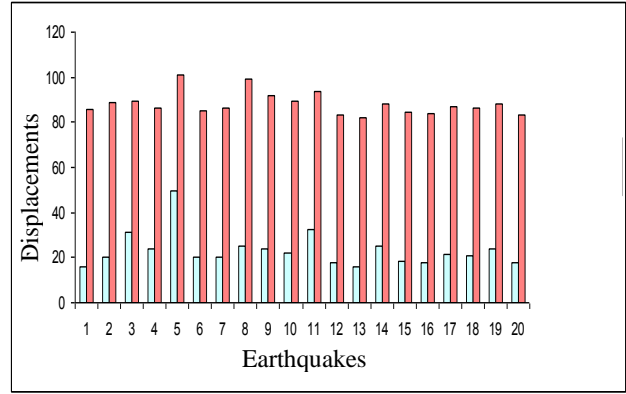


(b) A class Y direction displacements

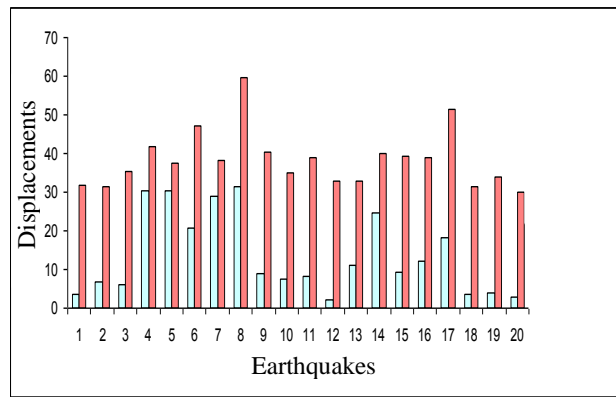


(c) B class X direction displacements

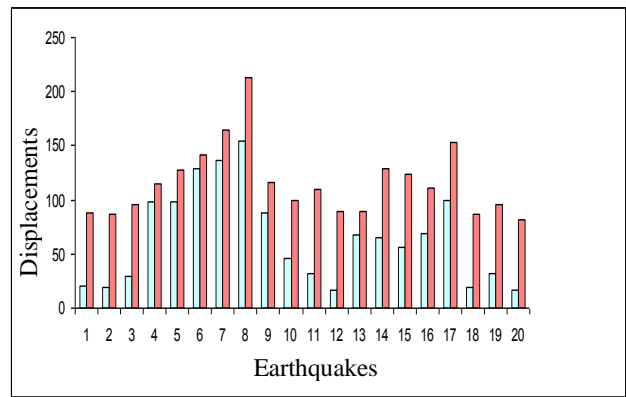

(d) B class Y direction displacements

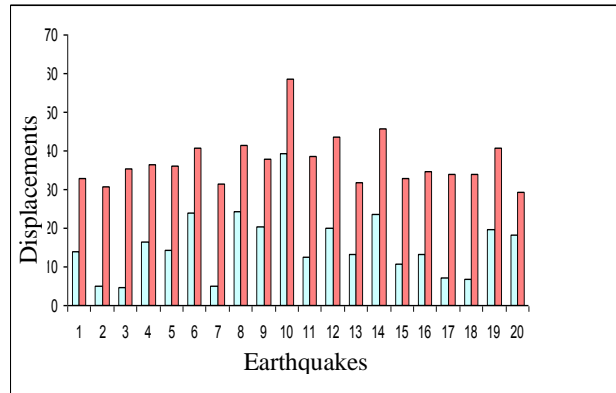

(e) C class X direction displacements

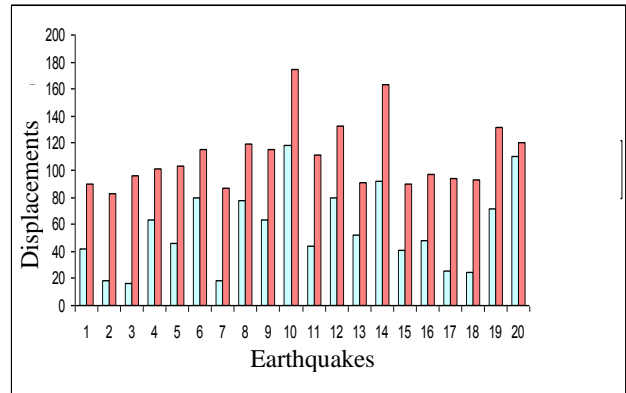


(f) C class Y direction displacements


Figure 12. The maximum displacement values of Oymapinar Dam.

data with number 8. The displacements values occurred as a result of the analyses performed by Loma Prieta earthquake record, viz; maximum 81.6 mm with full case and 56.9 mm with empty case. The magnitude of Loma Prieta earthquake is 6.9 and Loma Prieta earthquake has the most effective ground acceleration in A soil class. The


displacements obtained by using Landers earthquake magnitude (8.3) were smaller values than those obtained by using Loma Prieta earthquake. The focal length of Loma Prieta earthquake is 11.2 km and it is the earthquake having the smallest depth in A soil class. In the results, it was obtained by using number 20 and 1

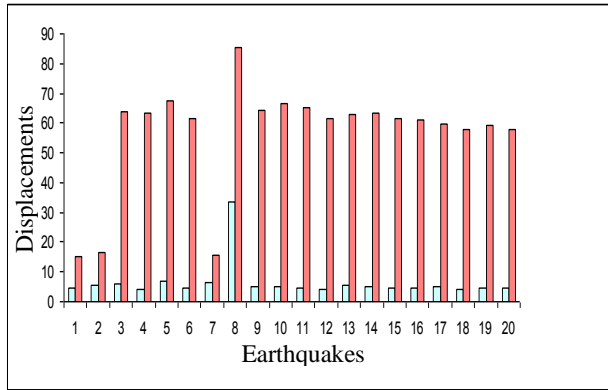


(a) A class X direction displacements

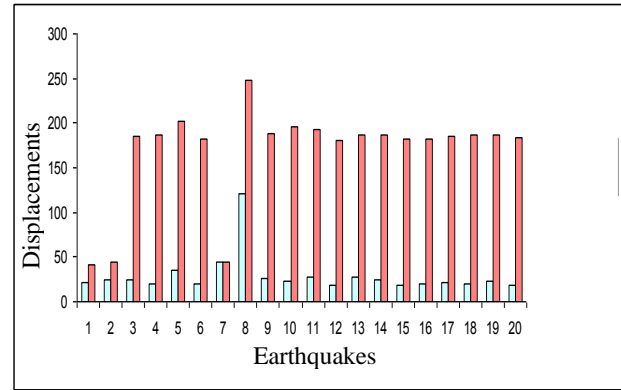


(b) A class Y direction displacements

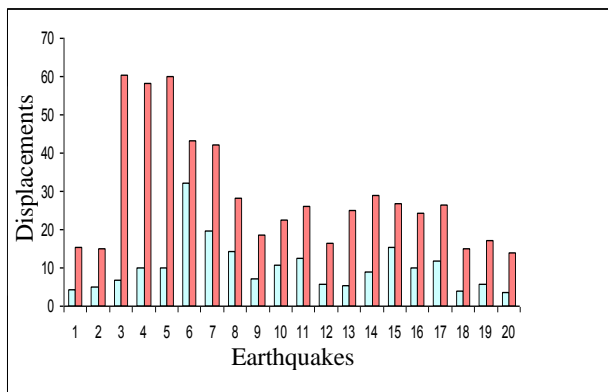


(c) B class X direction displacements

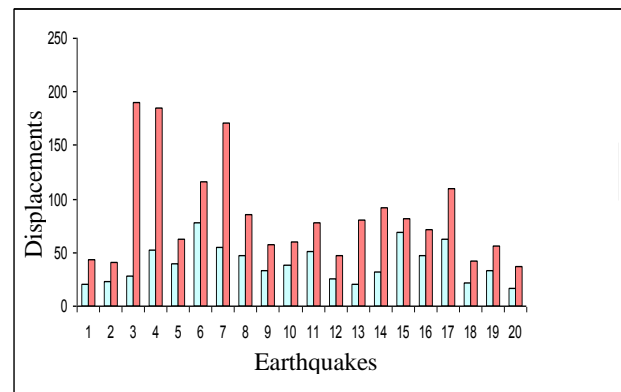

(d) B class Y direction displacements

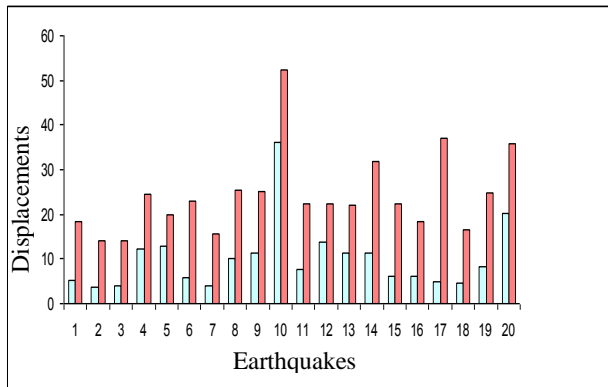

(e) C class X direction displacements

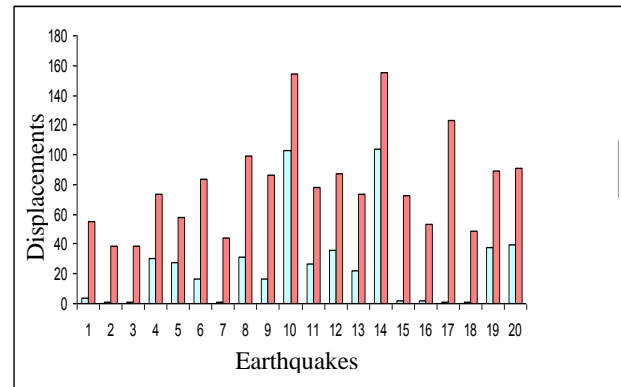


(f) C class Y direction displacements

**Figure 13.** The maximum displacement values of Karakaya Dam.


earthquake gives 32.9 mm and 33 mm displacements, respectively. The magnitude of Anza earthquake number 20 is the smallest value in A soil class. The displacement values close to each other in the empty and full case at X direction were obtained due to the act of water effects on the Y direction. While the biggest displacement value in full case at the Y direction was obtained as 247.6 mm, it

was obtained as 85.4 mm in empty case with Loma Prieta earthquake record number 8. This situation, the of effect ground acceleration value of Loma Prieta for earthquake number 8, is said to be more than the other earthquakes. The smallest displacement value in empty case was obtained as 33.9 mm with N. Palm Springs earthquake record number 13, and was obtained as




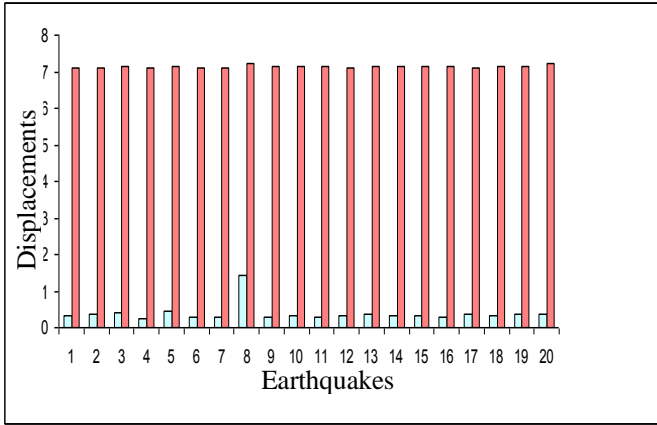


(a) A class X direction displacements

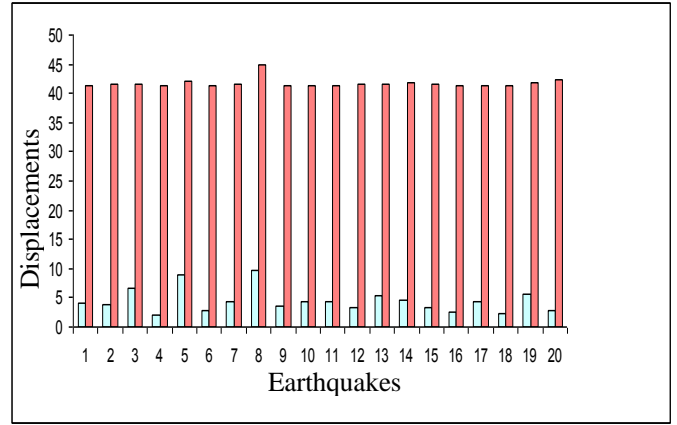


(b) A class X direction displacements

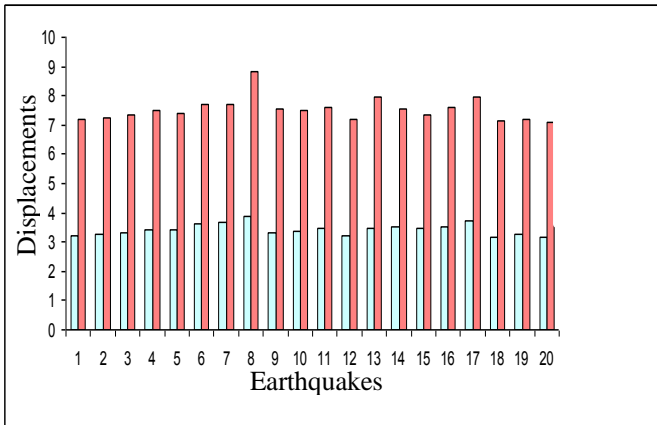


(c) B class X direction displacements

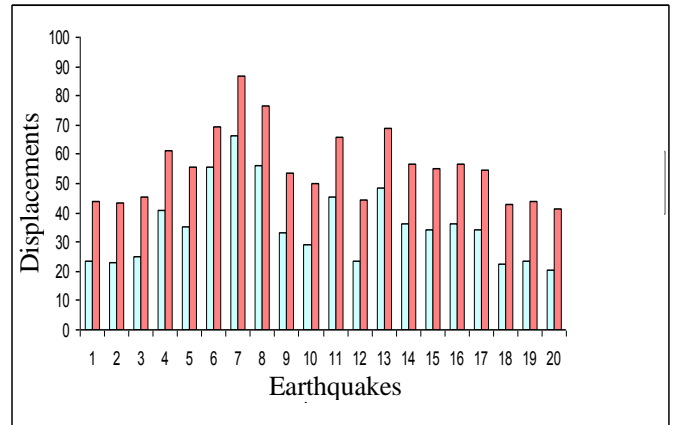

(d) B class Y direction displacements

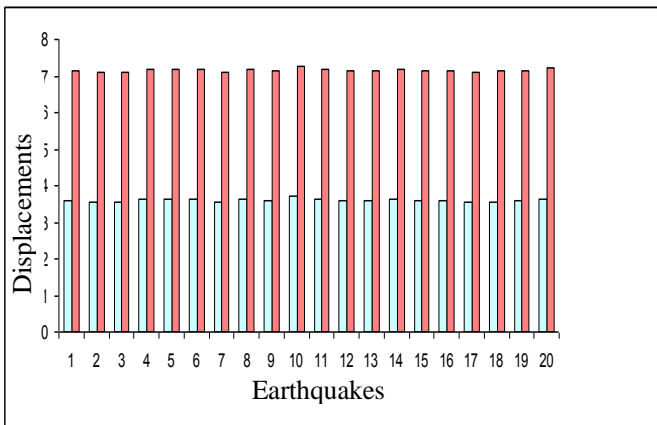

(e) C class X direction displacements

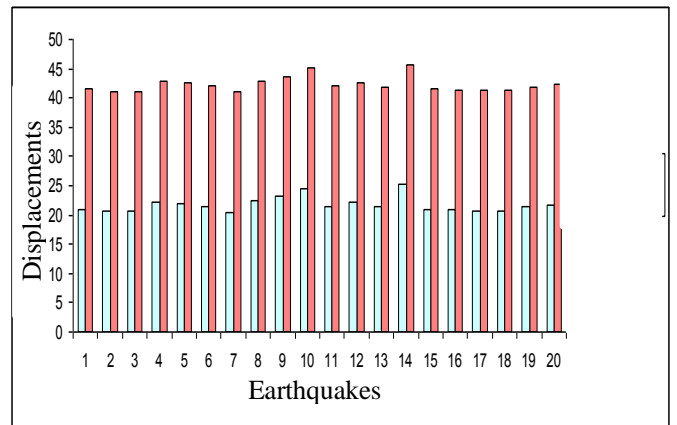


(f) C class Y direction displacements


Figure 14. The maximum displacement values of Gezende Dam.

181.2 mm with Lytle Creek Earthquake number 12 in full case.


For B soil class, the biggest displacement values at X direction were obtained as 62.2 mm with Norridge data

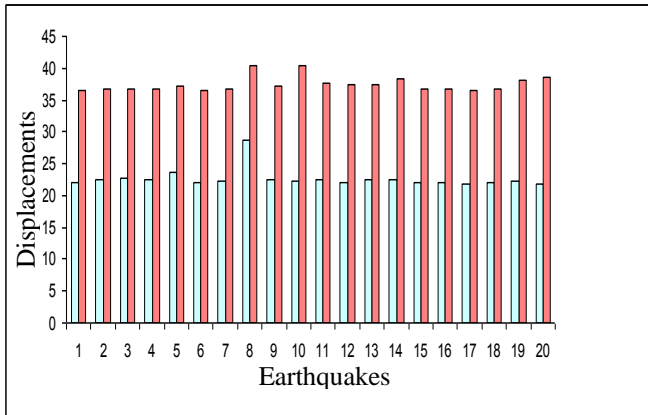


(a) A class X direction displacements

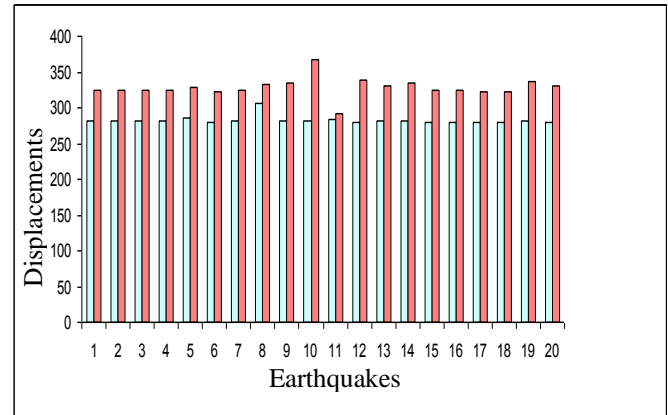


(b) A class Y direction displacements

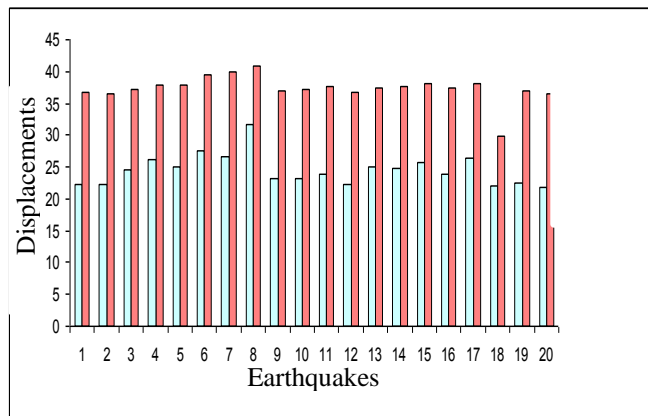


(c) B class X direction displacements

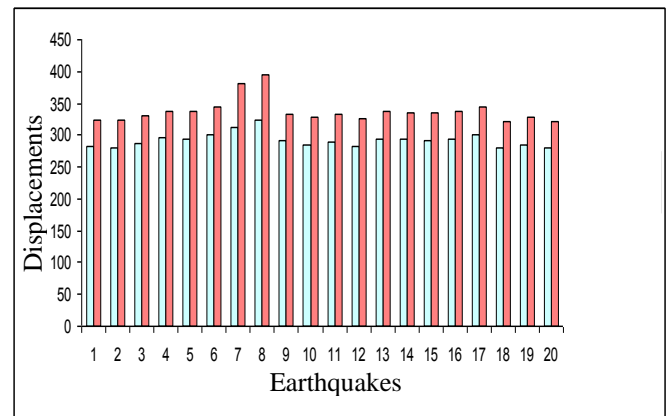

(d) B class Y direction displacements

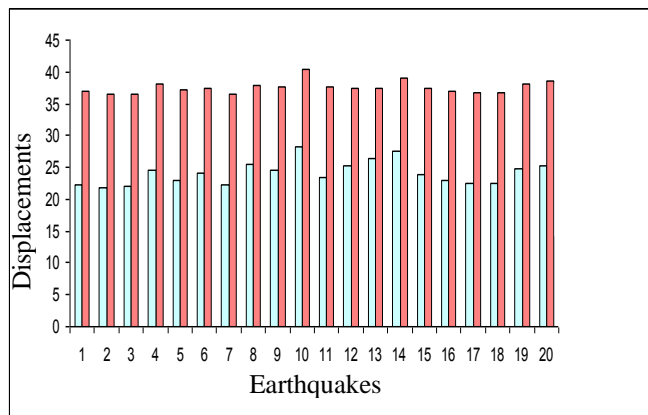

(e) C class X direction displacements

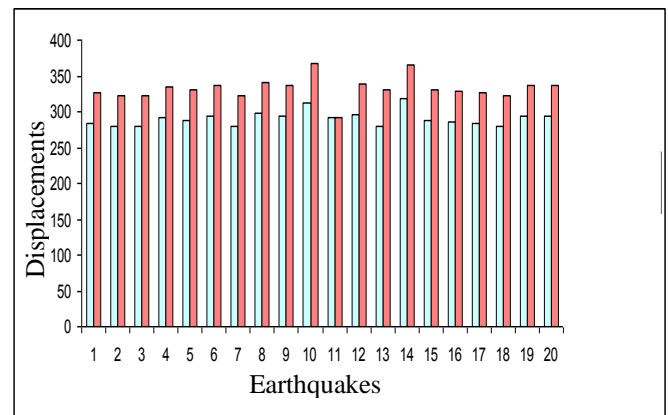


(f) C class Y direction displacements


**Figure 15.** The maximum displacement values of Sir Dam.

in empty case, while 91.4 mm in the full case. The effect of ground acceleration and focus depth of Northridge earthquake number 6 is the biggest value of B soil class. The biggest displacement at Y direction was obtained


with earthquake number 6 with 190.4 mm for empty case and 311.7 mm for full case. The smallest displacement was obtained as 53.5 mm for empty case and 182.9 mm for full case, using earthquake record number 20. These

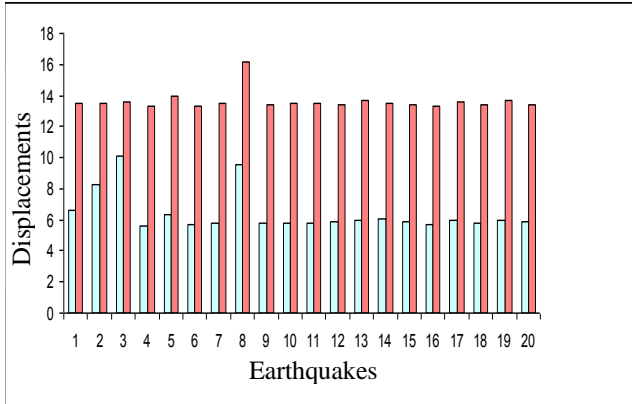


(a) A class X direction displacements

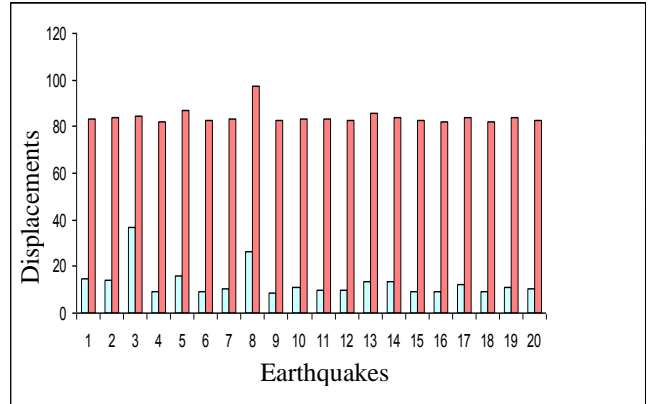


(b) A class Y direction displacements

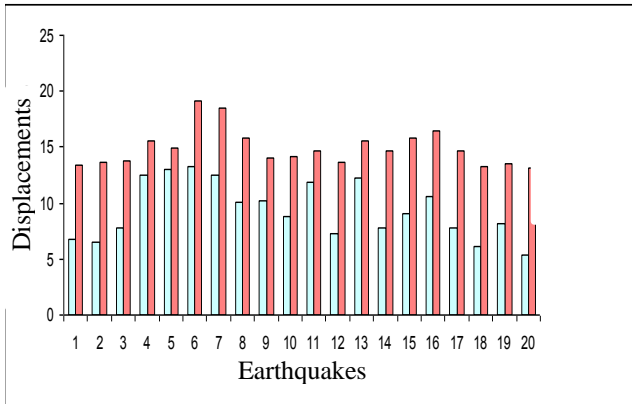


(c) B class X direction displacements

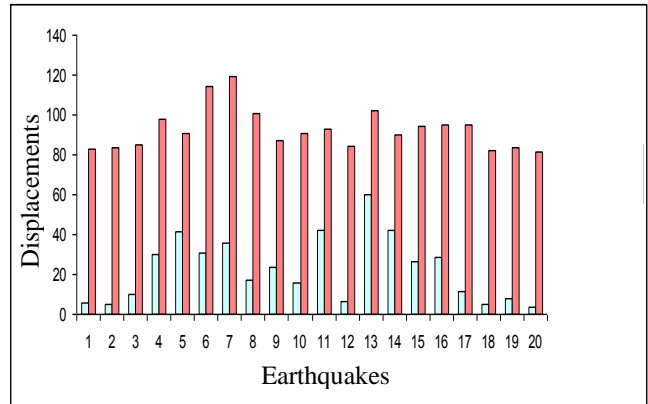

(d) B class Y direction displacements

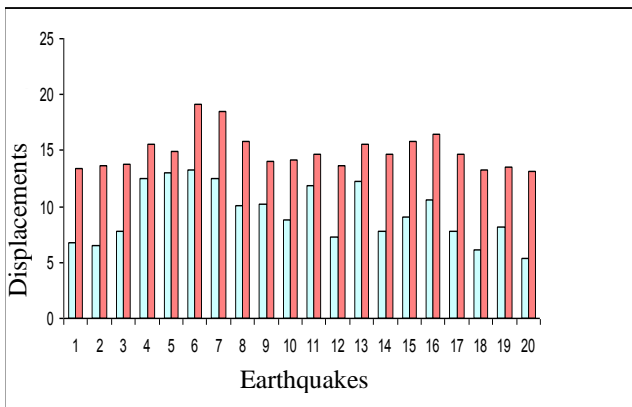

(e) C class X direction displacements

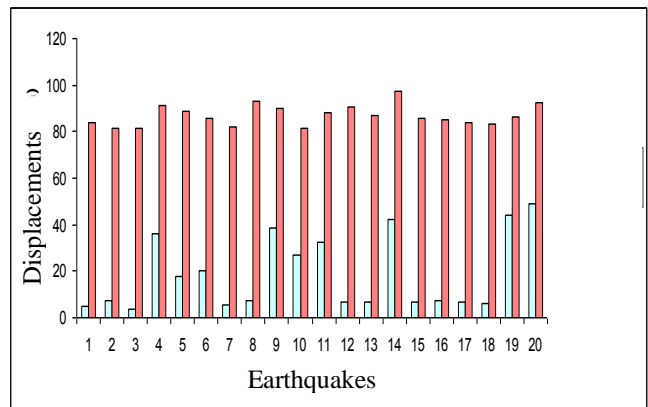


(f) C class Y direction displacements

**Figure 16.** The maximum displacement values of Berke Dam.


earthquakes were used to obtain the biggest and smallest displacement values at X and Y direction.

In the C soil class, the biggest displacement value at X direction was determined as 126.1 mm for full case with earthquake number 14. The smallest displacement value


was recorded as 32.7 mm for empty case and 57.5 mm for full case by using earthquake data number 14. The smallest displacement value was recorded as 183.2 mm for full case by using earthquake data number 14. The maximum displacement values at X and Y direction were

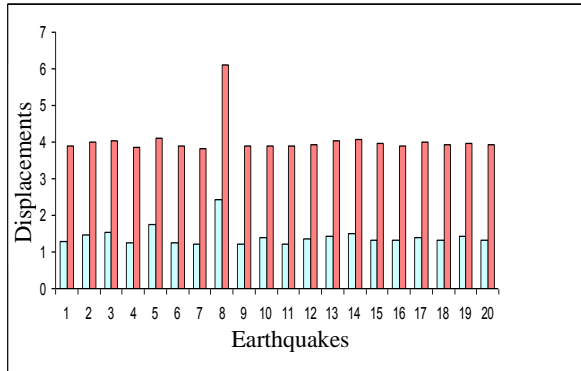


(a) A class X direction displacements

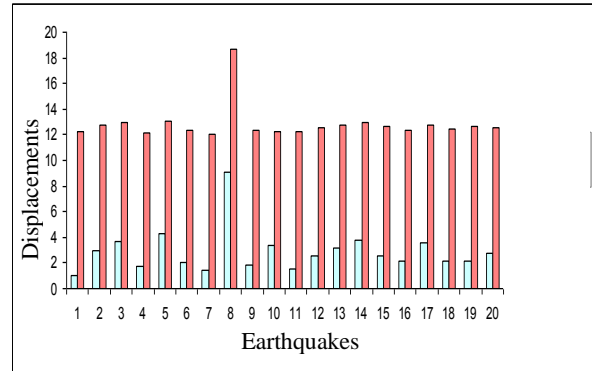


(a) A class Y direction displacements

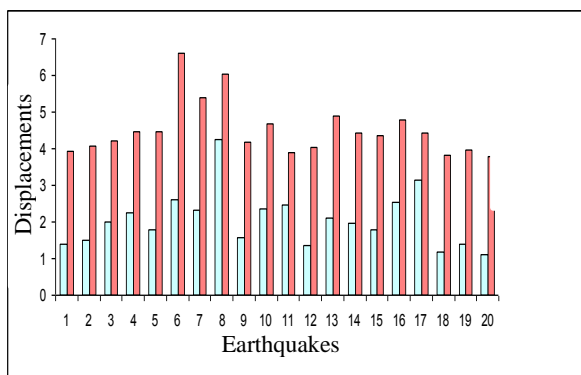


(c) B class X direction displacements

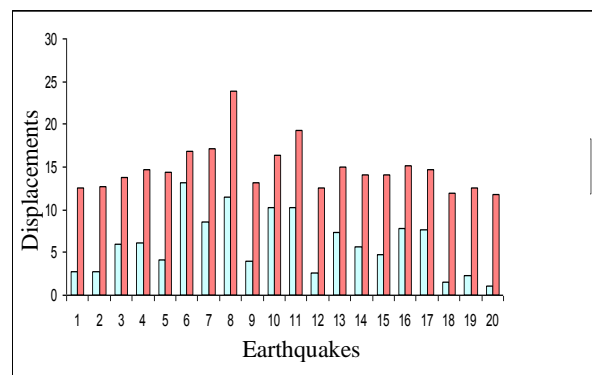

(d) B class X direction displacements

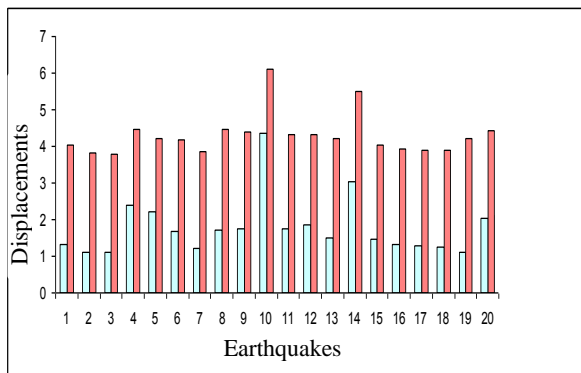

(e) C class X direction displacements

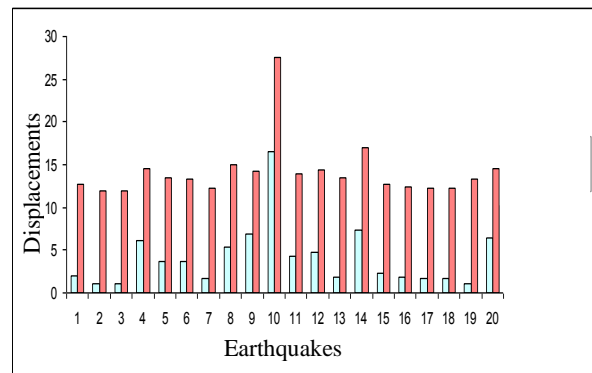

(f) C class X direction displacements

**Figure 17.** The maximum displacement values of Ermenek Dam.


obtained with Cape Mendocino Earthquake with magnitude 7.1.

### FRAGILITY ANALYSIS


Fragility analyses were previously used to determine seismic performance of various structures such as nuclear structures (Gergly, 1984) and have been more

recently used in the seismic analysis of other structures (Mosalam et al., 1997). This analyses expresses probability to define the damage risk of existing buildings.


Also, fragility is the propability expression of the vulnerability of structures. It is difficult to predict the structural performance or damage of future eartquakes since their magnitudes and impacts are unknown. To express the seismic risk for a structure and the probability response against the seismic ground motion are quite

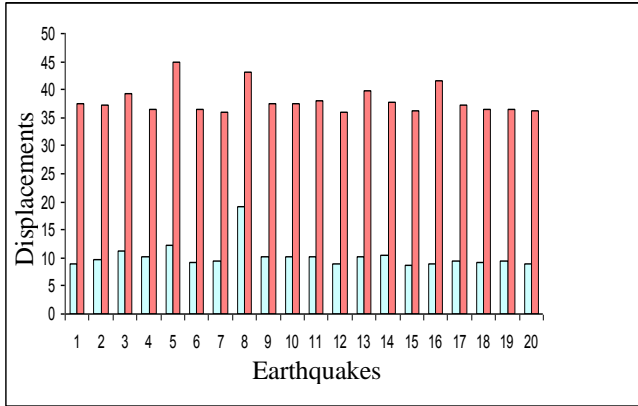


(a) A class X direction displacements

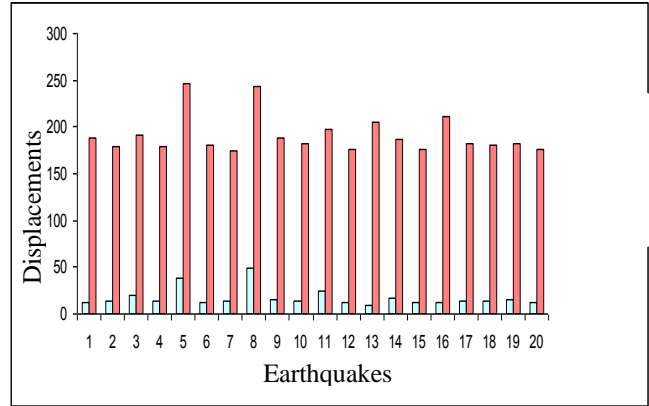


(a) A class Y direction displacements

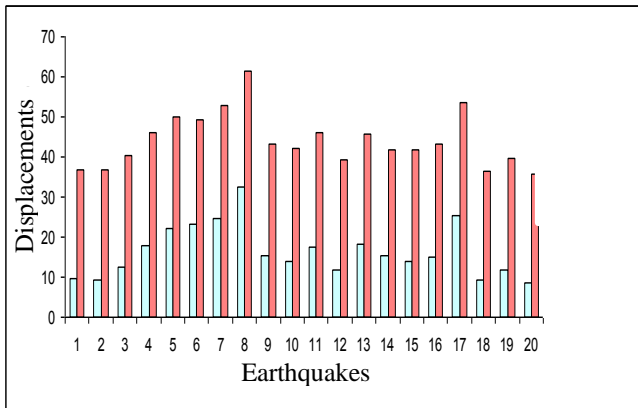


(c) B class X direction displacements

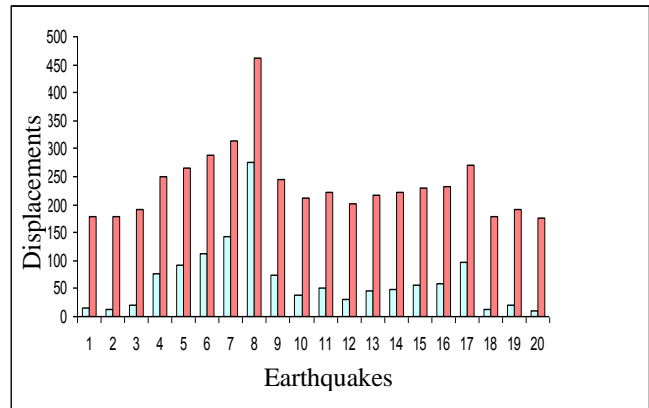

(d) B class Y direction displacements

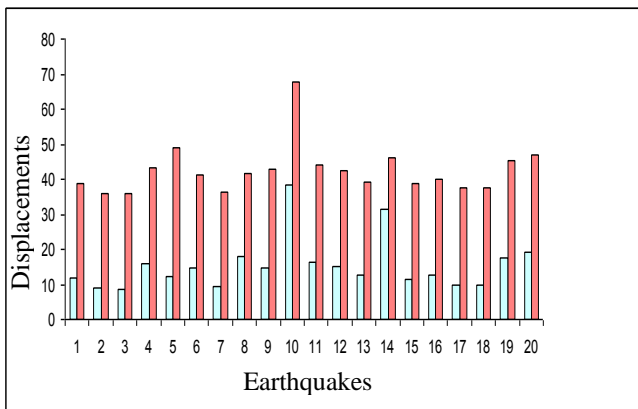

(e) C class X direction displacements

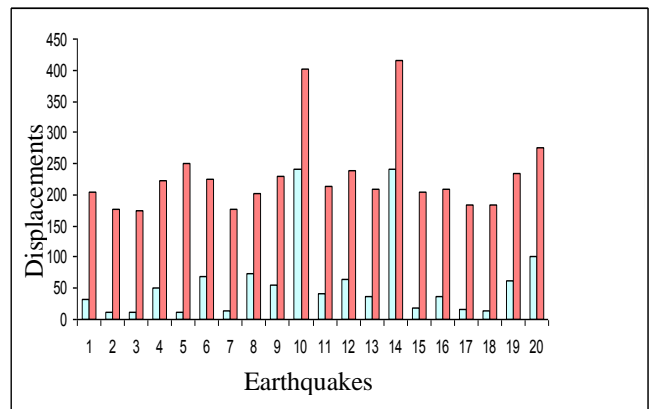

(f) C class Y direction displacements

Figure 18. The maximum displacement values of Deriner Dam.

important uncertainties in the fragility analysis. Fragility analysis generally can be grouped under three main headings which are uncertainties in modeling of the structure, the uncertainty due to ground motion and

uncertainties in limiting threshold of structure. Fragility curve, which is a function of the earthquake data parameters, is used to assess the probabilistic nature of the structure due to seismic loading. To forecast

structural behavior in future earthquakes, it is necessary to define existing behavior using past earthquake data.

Currently, fragility analysis methods, in FEMA-HAZUS regulations, are given depending on the fragility and the structural response spectra (FEMA, 1999; Dutta and Mander, 1998). In these methods, the probability of exceedance  $P_f$  and the distribution of spectral values were adopted in the form of logarithmic normal distribution. Fragility curves can be expressed for an entire structure or single structural component. These curves may be generated using the numerical analysis or experimental results. Fragility analysis is performed in four steps in the form of the identification of ground motion data, definition of ground motion, identification of structural damage and evaluation of the results. The exceedance probability on the y axis, the PGA, PGV or PGD in the x axis is given as one of the spectral acceleration values.

In the study by Hwang and Jaw (1988), fragility analysis was given in detail while Petrovski and Nocevs (1993) obtained fragility curves of structures which they addressed in their study. In previous studies, damage probability matrices were developed and they used the value of the rate of the relative story drift as damage parameter in fragility curves (Singhal, 1996; Erberik and Elnasha, 2004); and the value of  $S_d$  accepted, confirming a lognormal distribution for fragility curves, was used. Karimi and Bakhshi (2006) proposed fragility curves for masonry structures, using Cumulative Absolute Velocity (CAV) as ground motion parameters. Park-Ang model (1985) was used as damage parameter in their study. Rubinstein (1989) in consideration of the uncertainties in the structural parameters used Monte Carlo simulation technique. Karim and Yamazaki (2003) choose Park-Ang model as damage parameter studies in which they proposed the fragility curve for bridges, using the dynamic analysis beyond linear PGA and PGV values and adopted the Lognormal distribution as ground motion parameter; while in a later study they considered PGA, PGV and SI as ground motion parameter in their study (Karim and Yamazki, 2003). Their expression was simplified in terms of structural features, using the linear regression as the parameters for lognormal distribution. Shinozuka et al. (2000a) used section ductility demand as damage parameter which was derived of the fragility curves with time history and static analysis approach, using two different analytical approach for the bridges. In another study, the authors adopted PGA values as a part of lognormal distribution, which was used as ground motion parameter. Lognormal distribution parameters were determined by the maximum likelihood method. In the study, results were evaluated as a statistical analysis to sketch empirical and analytical fragility curves for bridges, and the ductility demand was used as damage parameter (Shinozuka et al., 2000b). Kim and Shinozuka (2004) used PGA parameter as lognormal distribution of ground motion parameters. In the study, they evaluated

the effect of reinforcement in the bridge columns. Tsopelas and Pekcan (1999) performed a research on the reinforcement and suggested an improvement, using seismic fragility curves and performance methods. They focused on the modeling with the fragility analysis of the structural behavior. In their method, structural behavior is directly applied on a structure. All these studies can be used as a part of determining the probabilistic structural behavior.

## PROBABILISTIC SEISMIC ASSESSMENT OF ARCH DAMS


Various research works evaluated dams and the probabilities were performed using fragility analysis, which relates to evaluating the probabilistic seismic behavior of dams. Among them, Chopra and Gregory (1987) discussed the fragility analysis of dams. In the study performed by Ellingwood and Teike (2001), detailed information about the fragility analysis of dams was given and the fragility analysis of the concrete gravity dams was expressed in the study's scope. Another significant study carried out was by Papadrakakis et al. (2008). They described a new approach to increase the accuracy of probabilistic demand definition in seismic areas.

In the present study, probabilistic seismic analysis of arch dams was performed using fragility analysis. The scope of the study covers fragility analyses carried out and probabilistic seismic behavior of arch dams as a result of the analysis. Fragility was expressed with a conditional probability expression in form of the probability of exceedance:


$$\text{Probability of exceedance} = P[R \geq r | I] \quad (4)$$

Here, R: the structural response calculated at the result of analysis; r: the damage level predicted for the minimum value of the structural response; I: ground motion parameter used as the random variable for the purpose of calculating the damage limit state of the structural response. The data used for the fragility curves were obtained from past earthquakes, results of experiments, results of analysis or engineering experiences.


The graphs for A, B and C soil classes in the empty and full cases of dams were obtained. The fragility curves obtained for all soil classes in Figure 19 and Figure 20 were presented for X and Y directions respectively, without considering the water effect. The fragility curves obtained for all soil classes in Figures 21 and 22 were presented for X and Y directions respectively, with consideration for the water effect. It was seen that the yield and collapse limit state as well as exceedance probabilities have increased in this order: Ermenek, Oymapinar, Gezende, Karakaya, Berke, Deriner,

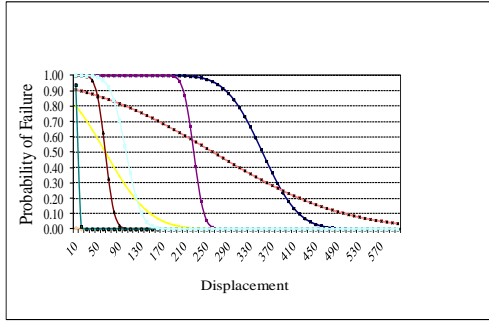

a) For A soil class

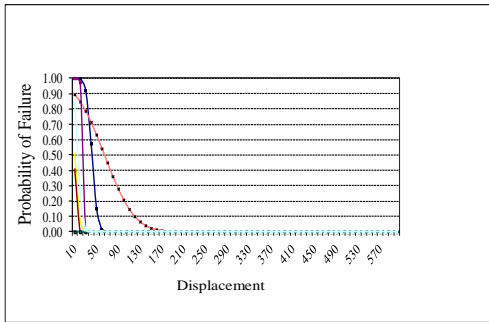

b) For B soil class

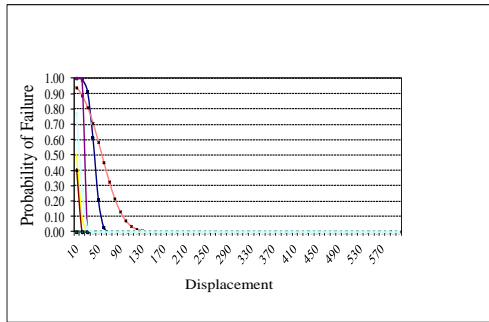

c) For C soil class

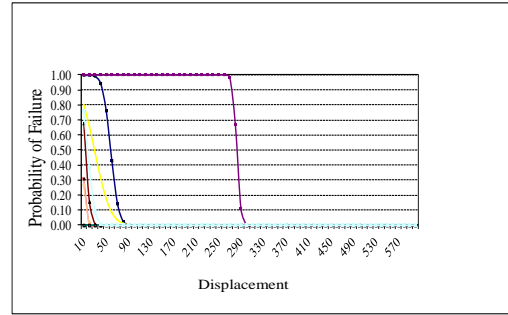


Figure 19. The X-direction fragility curves obtained without taking into account the water effect for all soil classes.


Gökçekaya and Sir Dams for empty and full cases. This order can be seen in the Fragility curves in Figures 19 to 22.

**Conclusion**


The results of the dynamic analysis were used in the propabilistic seismic evaluation researches performed within this scope of study. Exceedance probability of displacement values were determined using the dynamic analysis, and the fragility curves were plotted. The graphs



a) For A soil class

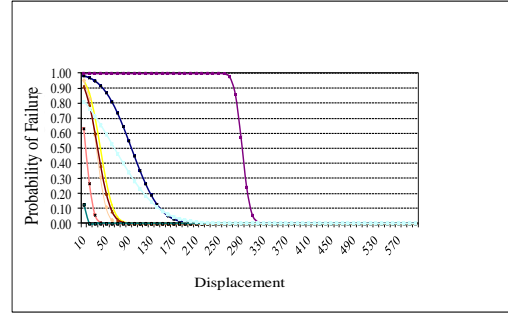

b) For B soil class

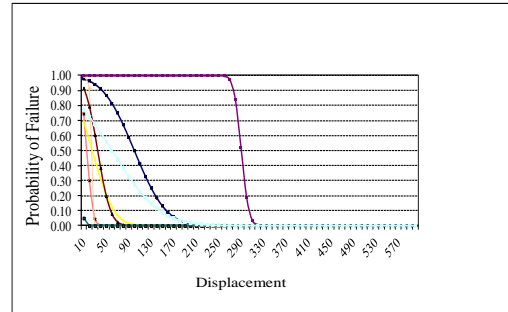


c) For A soil class




Figure 20. The Y-direction fragility curves obtained without taking into account the water effect for all soil classes.


were created under this section with these values, by obtaining exceedance probabilities against each displacement value in the fragility curves plotted. All dams can be seen on a graph using this approach. In the result of this study performed, sepeate graphs were obtained for A, B and C soil classes. The fragility curves were obtained by considering the effect of water and were also obtained for all soil classes as presented respectively for X and Y directions without taking into account the effect of water. When the graphs were examined, It was seen that the yield and limit state exceedance probabilities increased in this order: Ermenek, Oymapınar, Gezende, Karakaya, Berke, Deriner, Gökçekaya and Sir Dams for empty and full cases.

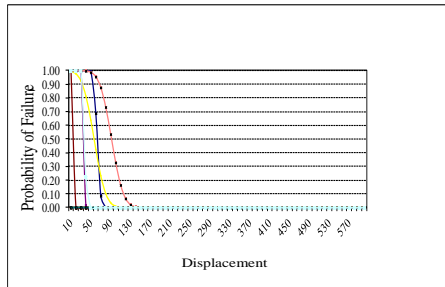

a) For A soil class

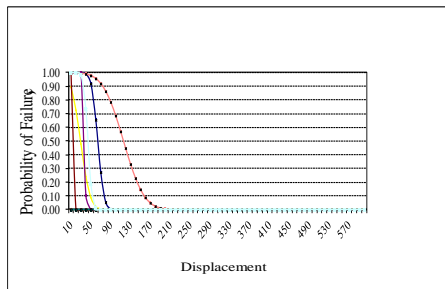

b) For B soil class

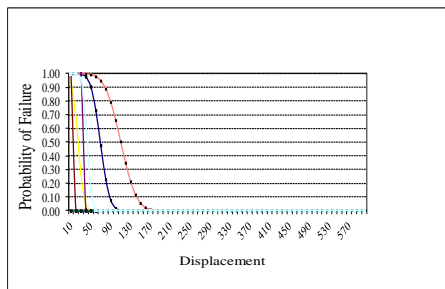

c) For C soil class



**Figure 21.** The X-direction fragility curves obtained taking into account the water effect for all soil classes.


This order can be seen in the Fragility curves in Figures 19 to 22.

## CONFLICT OF INTERESTS


The authors have not declared any conflict of interests.

## REFERENCES


- Ahmadi MT, Izadinia M, Bachmann H (2001). A Discrete crack joint model for nonlinear dynamic analysis of concrete arch dams. *Computers and Structures* 79(4):403-420.
- Azmi M, Paultre P (2002). Three-dimensional analysis of concrete dams including contraction joint non-linearity. *Engineering Structures* 24(6):757-771.
- Bathe KJ (1996). *Finite Element Procedures in Engineering Analysis*, Prentice-Hall, Englewood Cliffs, New Jersey.
- Calayir Y, Karaton M (2005). A Continuum damage concrete model for earthquake analysis of concrete gravity dam-reservoir system. *Soil*

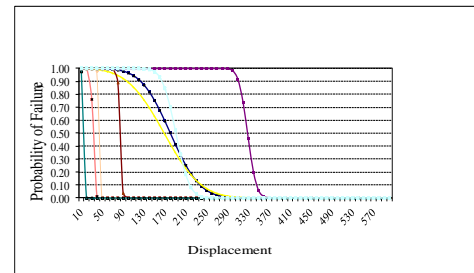

a) For A soil class

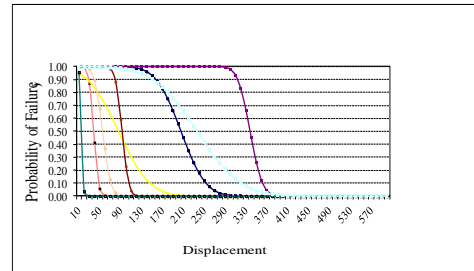

b) For B soil class

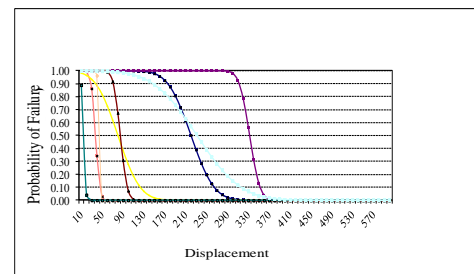

c) For C soil class



**Figure 22.** The Y-direction fragility curves obtained taking into account the water effect for all soil classes.

- Dynamics And Earthquake Engineering* 25(11):857-869.
- Castaldo P, Palazzo B, Della Vecchia P (2015). Seismic reliability of base-isolated structures with friction pendulum bearings. *Engineering Structures* 95:80-93.
- Castaldo P, Palazzo B, Della Vecchia P (2016a). Life cycle-cost and seismic reliability analysis of 3D systems equipped with FPS for different isolation. *Engineering Structures* 125:349-363.
- Castaldo P, Palazzo B, Ferrentino T, Petrone G (2016b). Influence of the strength reduction factor on the seismic reliability of structures with FPS considering intermediate PGA/PGV ratios", *Composites Part B: Engineering* 115:308-315.
- Castaldo P, Amendola G, Palazzo B (2017a). Seismic fragility and reliability of systems isolated by friction pendulum device: Seismic reliability-based Design (SRBD), *Earthquake Engineering and Structural Dynamics* 46(3):425-446.
- Castaldo P, Palazzo B, Ferrentino T (2017b). Seismic reliability-based ductility demand evaluation for inelastic base-isolated structures with friction pendulum devices. *Earthquake Engineering and Structural Dynamics* 46(8):1245-1266.
- Chopra A, Gregory FK (1987). Simplified Earthquake Analysis of Concrete Gravity Dams. *Journal of Structural Engineering* 113(8):1688-1708.
- Dutta A, Mander JB (1998). *Seismic Fragility Analysis of Highway*



- Bridges in Center-to-Center Project Workshop on Earthquake Engineering Frontiers in Transportation Systems, International Center for Disaster-Mitigation Engineering (INCEDE), Tokyo, Japonya pp. 311-325.
- Ellingwood B, Teike PB (2001). Fragility Analysis of Concrete Gravity Dams. *Journal of Infrastructure Systems* 7(2):41-48.
- Erberik MA, Elnashai AS (2004). Fragility Analysis of Flat-Slab Structures, *Engineering Structures* 26(7):937-948.
- Espander R, Lotfi V (2003). Comparison of non-orthogonal smeared crack and plasticity models for dynamic analysis of concrete arch dams. *Computers and Structures* 81(14):1461-1474.
- Federal Emergency Management Agency (FEMA) (2005). Federal Guidelines for Dam Safety. Earthquake, Analyses and Design of Dams.
- Federal Emergency Management Agency (FEMA) (1999). Federal Emergency Management Agency, HAZUS 99. Estimated Annualized Earthquake Losses for The United States FEMA 366, Washington DC, USA.
- Gergly P (1984). Seismic Fragility of RC Structures and Components for Application to Nuclear Facilities, Teknik Rapor, Lawrence Laboratuvarlari, Livemore. (No. UCID--20164). Cornell Univ.
- Hwang HM, Jaw JW (1988). Seismic Fragility Analysis of Frame Structures, Technical Report, NCEER-88-00009 New York Eyalet Universitesi, Buffalo, NY, USA.
- ICOLD (1989). Selecting parameters for large dams—guidelines and recommendations. ICOLD Committee on Seismic Aspects of Large Dams, Bulletin, vol. 72.
- Inel M, Ozmen H, Bilgin H (2008). Re-evaluation of building damage during recent earthquakes in Turkey. *Engineering Structures* 30(2):412-427.
- Javanmardi F, Leger P, Tinawi R (2005). Seismic structural stability of concrete gravity dams considering transient uplift pressures in cracks. *Engineering Structures* 27(4): 616-628.
- Karim KR, Yamazaki F (2003). A Simplified Method of Constructing Fragility Curves for Highway Bridges, *Earthquake Engineering and Structural Dynamics* 32:1603-1626.
- Karimi K, Bakhshi A (2006). Development of Fragility Curves for Unreinforced Masonry Buildings Before and After Upgrading Using Analytical Method, First European Conference on Earthquake Engineering and Seismology, Geneva, İsviçre.
- Kim SH, Shinozuka M (2004). Development of Fragility Curves of Bridges Retrofitted by Column Jacketing. *Probabilistic Engineering Mechanics* 19(1-2):105-112.
- Korkmaz KA (2005). Yapi Sistemlerinin Güvenilirlik Esaslı Performansa Bağlı Analizi, Doktora Tezi, Dokuz Eylül Üniversitesi Fen Bilimleri Enstitüsü, İzmir, Türkiye.
- Leclerc M, Leger P, Tinawi R (2003). Computer aided stability analysis of gravity dams (CADAM). *Engineering Software* 34(7):403-420.
- Marek P (2003). Probabilistic Assessment of Structures, 2. Basi, TEREKO, Prak, Çek Cumhuriyeti.
- Mosalam KM, White RN, Gergeley P (1997). Static Response of Infilled Frames Using Quasi-Static Experimentation, *Journal of Structural Engineering* 123(11):1462-1469.
- Papadrakakis M, Papadopoulos V, Lagaros ND, Oliver J, Huespe AE, Sánchez P (2008). Vulnerability Analysis of Large Concrete Dams Using The Continuum Strong Discontinuity Approach and Neural Networks. *Structural Safety* 30(3):217-235.
- Petrovski S, Nocevski NK (1993). Definition of Empirical And Theoretical Models for Assessment of High Rise Buildings, Teknik Rapor, IZIS Skopje, Makedonya Cumhuriyeti.
- Pimenta L, Caldeirab L, Neves EM (2013). A new qualitative method for the condition assessment of earth and rockfill dams. *Structure and Infrastructure Engineering* 9(11):1103-1117.
- Rubinstein RY (1989). Sensitivity Analysis of Computer Simulation Models via the Score Efficient. *Operations Research* 37:72-81.
- Shinozuka M, Feng MQ, Kim HK, Kim SH (2000a). Nonlinear Static Procedure for Fragility Curve Development. *Journal of Engineering Mechanics* 126(12):1287-1295.
- Shinozuka M, Feng MQ, Lee J, Naganuma T (2000b). Statistical Analysis of Fragility Curves. *Journal of Engineering Mechanics* 126(12):1224-1231.
- Singhal A (1996). A Method for Earthquake Motion Damage Relations with Application to RC Frames, Doktora Tezi, New York Devlet Üniversitesi, NY.
- Tosun H, Zorluer I, Orhan A, Seyrek E, Savas H, Turkoz M (2007). Seismic hazard and total risk analyses for large dams in Euphrates basin, Turkey. *Engineering Geology* 89:155-170.
- Turkman F (1991). Optimization of large scale hydroelectric generating systems, *Engineering Optimization* 17:237-245.
- Tsopelas P, Pekcan C (1999). Seismic Fragility and Retrofit of non Ductile RC Structures, Technical Report, New York Devlet Üniversitesi, Buffalo, NY.
- Uddin N (1999). A Dynamic analysis procedure for concrete faced rockfill dams subjected to strong seismic excitation. *Computers and Structures* 72(1-3):409-421.
- Yu Y, Xie L, Zhang B (2005). Stability of earth-rockfill dams: influence of geometry on the three-dimensional effect. *Computers and Geotechnics* 32(5):326-339.
- Westergard HM (1933). Water Pressures on Dams During Earthquakes. *Transactions ASCE* 98(1835):418-433.
- Zhang J, He J, Fan J (2001). Static and dynamic stability assessment of slopes or dam foundations using a rigid body-spring element method. *International Journal of Rock Mechanics and Mining Sciences* 38(8):1081-1090.

## Related Journals:

